




Grade 30 Proof Coil Chain - low carbon steel

A general utility chain for farm, industry and home applications.

Specifications				
Diameter in.	Inside Dimensions in.		Working Load Limit lbs.	Weight / 100 ft. lbs
	A	B		
1/8	0.69	.25	325	20
3/16	0.97	.33	630	29
1/4	1.14	.43	1100	52
5/16	1.24	.50	1900	85
3/8	1.35	.57	2650	124
1/2	1.70	.75	4500	234

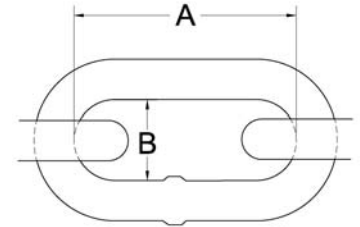

Safety Factor 3:1

Test certificate available – Do not use for overhead lifting

Self Colored		
Drum		
Code	Diameter in.	Pack ft.
53000	1/8	1250
53001	3/16	800
53002	1/4	450
53003	5/16	275
53004	3/8	200
53005	1/2	100
Seau / Pail		
52000	1/8	250
52001	3/16	150
52002	1/4	100
52003	5/16	75
52004	3/8	45
52005	1/2	25

Zinc Plated		
Drum		
Code	Diameter in.	Pack ft.
53010	1/8	1250
53011	3/16	800
53012	1/4	450
53013	5/16	275
53014	3/8	200
53015	1/2	100
Pail		
52009	1/8	250
52010	3/16	150
52011	1/4	100
52012	5/16	75
52013	3/8	45
52014	1/2	25
Reel		
51000	3/16	100
51001	1/4	65
51002	5/16	60
51003	3/8	35
51009	1/8	150



Self Colored



Zinc Plated



Hot Dipped Galvanized

For grade 70 see page 89
For grade 80 see page 60




Hot Dipped Galvanized		
Drum		
Code	Diameter in.	Pack ft.
53020	1/8	1250
53021	3/16	800
53022	1/4	450
53023	5/16	275
53024	3/8	200
53025	1/2	100
Pail		
52020	1/8	250
52021	3/16	150
52022	1/4	100
52023	5/16	75
52024	3/8	45
52025	1/2	25



Grade 40 High Tensile Chain - carbon steel

Grade 40 high tensile chain has a higher resistance to wear than Grade 30. It is a perfect product for farming, heavy duty trucking and similar tasks.



Specifications				
Diameter in.	Inside Dimensions in.		Working Load Limit lbs.	Weight / 100 ft. lbs
	A	B		
1/4	0.90	.44	2600	71
5/16	1.12	.48	3900	102
3/8	1.35	.57	5400	140
1/2	1.70	.75	9200	234

Safety Factor 3:1

Test certificate available – Do not use for overhead lifting




Self colored		
Drum		
Code	Diameter in.	Pack pi. / ft.
53030	1/4	400
53031	5/16	275
53032	3/8	200
53033	1/2	100



Hot Dipped Galvanized		
Drum		
Code	Diameter in.	Pack ft.
53034	1/4	450
53035	5/16	275
53036	3/8	200
53037	3/8	400

Stainless Steel Chain 316 L



Code	Diameter		Working Load Limit lbs.	Inside Dimensions in.		Weight per 100 ft lbs.
	mm	in.		A	B	
CHS-564	2	5/64	70	0.14	0.48	5
CHS-018	4	1/8	400	0.27	0.91	20
CHS-316	5,5	3/16	800	0.40	0.96	40
CHS-014	7	1/4	1,300	0.43	1.18	66
CHS-516	8	5/16	1,700	0.50	1.26	86
CHS-038	10	3/8	2,650	0.60	1.31	142
CHS-012	13	1/2	4500	0.72	1.79	242

Safety Factor 4:1

Stainless Steel